

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICANT:	LUMPKIN	}	EXAMINER: LAZO, THOMAS E.
SERIAL NO.:	10/647,543		ART UNIT: 3683
FILED:	AUGUST 25, 2003		CONFIRMATION NO: 3122
PATENT NO.:	6,957,534		
ISSUED:	OCTOBER 25, 2005		
TITLE:	REACH ADJUSTMENT MECHANISM FOR A MASTER CYLINDER LEVER OF A HYDRAULIC DISC BRAKE	}	

Attn: Certificate of Correction Branch
 Commissioner for Patents
 P.O. Box 1450
 Alexandria, VA 22313-1450

**REQUEST FOR CORRECTION TO
 CERTIFICATE OF CORRECTION
 FOR PTO MISTAKES**

Sir:

Attached is a marked up copy of a Certificate of Correction which the Patent Office has retyped and introduced errors. A marked up copy of the Certificate of Correction showing the new errors is attached. The first occurs on page 2 of 4 at the second to last entry, where an additional degree sign has been added. If the patent were read literally with the error added, it would read "90°-108°".

The second error is on page 3 of 4. Claim 21 was retyped and introduced into this Certificate although it had been previously included in the Certificate dated August 22, 2006. The third clause now ends with a comma rather than a semi-colon.

Also attached is a Certificate of Correction suitable for printing. The undersigned requests that the Office not retype this document, so as to avoid additional introduction of errors.

Please send this Certificate to:

Thomas D. Bratschun
Swanson & Bratschun, L.L.C.
8210 Southpark Terrace
Littleton, Colorado 80120

Respectfully submitted,

Date: _____

8/9/07



Thomas D. Bratschun, #32,966
Swanson & Bratschun, L.L.C.
8210 Southpark Terrace
Littleton, Colorado 80120
Telephone: (303) 268-0066
Facsimile: (303) 268-0065

S:\CLIENTFOLDERS\AVID\18\18-2\C\REQUEST TO CORRECT PATENT 4.DOC

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
 APPLICATION NO. : 10/647543
 DATED : October 25, 2005
 INVENTOR(S) : Wayne R. Lumpkin

Page 1 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The title page should be deleted to appear as per attached title page.

In Fig. 7, delete section line label "B-B" and insert --8-8--.




Fig. 7

Amended




Fig. 8

In Fig. 11, replace number designations "32" with --34--.

In Fig. 11, replace number designations "34" with --32--.




Fig. 11

Amended

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
 APPLICATION NO. : 10/647543
 DATED : October 25, 2005
 INVENTOR(S) : Wayne R. Lumpkin

Page 2 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In Fig. 12, replace number designations "32" with --34--.

In Fig. 12, replace number designations "34" with --32--.




Fig. 12

Amended

At column 4, line 23, delete "line 12-12 of FIG. 1" and insert --line 12-12 of FIG. 10--.

At column 4, line 25, delete "FIG. 1" and insert --FIG. 10--.

At column 4, line 54, delete "24-24" and insert --25-25--.

At column 9, lines 32, delete "34" and insert --32--.

At column 9, line 52, delete "264" and insert --212--.

At column 10, line 17, delete "242" and insert --241--.

At column 11, line 8, delete "900-108" and insert --90°-108°--.

At column 19, lines 60, delete "for moving for piston" and insert --for moving the piston--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
APPLICATION NO. : 10/647543
DATED : October 25, 2005
INVENTOR(S) : Wayne R. Lumpkin

Page 3 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The last two clauses of Claim 21 were truncated in the printing of the patent. Claim 21 in its entirety appears below:

21. A master cylinder for a bicycle hydraulic disc brake, the master cylinder comprising:
- a housing defining a cylinder, the cylinder having a first and second end;
 - a hydraulic fluid reservoir;
 - a port between the hydraulic fluid reservoir and the cylinder providing fluid communication between the hydraulic fluid reservoir and the cylinder, the port having a port opening located between the first and second ends of the cylinder;
 - a piston received in the cylinder having a seal operatively associated therewith, the seal having a leading edge, the leading seal edge being moveable between a select starting position with the leading seal edge between the first end and the port opening with the leading seal edge a select distance from the port opening and a pressurized position with the leading seal edge between the port opening and the second end, the leading seal edge preventing fluid flow between the cylinder and the reservoir when positioned between the port opening and the second end to pressurize the second end;
 - a one piece lever pivotably attached to the housing, the lever being associated with the piston to move the piston between the select starting position and the pressurized position as the lever is pivoted between the rest position and a fully actuated position;
 - reach adjustment means operatively associated with the lever for varying the rest position of the lever with respect to the housing independently of movement of the select distance between the port opening and the leading seal edge; and
 - dead band adjustment means operatively associated with the piston for moving the leading seal edge to adjust the select distance between the port opening and the leading seal edge without varying the rest position of the lever.

Signed and Sealed this

Eighth Day of May, 2007



Jon W. Dudas

JON W. DUDAS
Director of the United States Patent and Trademark Office

(12) **United States Patent**
Lumpkin

(19) Patent No.: **US 6,957,534 B2**
(45) Date of Patent: ***Oct. 25, 2005**

(54) **REACH ADJUSTMENT MECHANISM FOR A MASTER CYLINDER LEVER OF A HYDRAULIC DISC BRAKE**

(75) Inventor: **Wayne R. Lumpkin, Littleton, CO (US)**

(73) Assignee: **SRAM Corporation, Chicago, IL (US)**

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 53 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **10/647,543**

(22) Filed: **Aug. 25, 2003**

(57) **Priority Publication Data**
US 2004/0255890 A1 Mar. 25, 2004

Related U.S. Application Data

(53) Continuation of application No. 09/216,596, filed on Dec. 10, 2002, now Pat. No. 6,804,661.

(52) Provisional application No. 60/046,055, filed on Oct. 5, 2002, provisional application No. 60/046,130, filed on Oct. 4, 2002, and provisional application No. 60/244,430, filed on Dec. 28, 2002.

(51) Int. Cl. **B62K 23/06; B62L 3/02**

(52) U.S. Cl. **405/88; 60/524; 182/26**

(53) Field of Search **74/522.2; 74/523**

(58) Field of Search **60/583; 594; 585; 60/588; 594; 168/502.2; 325; 74/26; 344**

(59) **References Cited**

U.S. PATENT DOCUMENTS

4,560,049 A 12/1985 Uchiyama
4,626,043 A 12/1986 Takai
4,779,482 A 10/1988 Kawaguchi
4,876,246 A 11/1989 McLaughlin
5,682,262 A 5/1997 Leitner

6,003,639 A * 12/1999 Bradley et al. 182/26
6,063,523 A 7/2000 Bradley
6,457,578 B2 10/2002 McLaughlin
6,804,901 B2 10/2004 Lumpkin

FOREIGN PATENT DOCUMENTS

DE 197 18 612 A1 11/1998
DE 199 18 736 U1 12/2000
EP 0 806 337 1/1999

OTHER PUBLICATIONS

Formula Evoluzione 9.5 Operating Manual, 2005, English Version, Author: Formula, an Italian Corporation.

Formula 6-Speed FR—(Racing) DFI Spare parts price list, 2002-2003 Original Spare Parts, English version, Author: Formula, an Italian Corporation.

Communication pursuant to Article 96(2) EPC, dated Feb. 18, 2004 in EP Application No. 02 080 490.2.

* cited by examiner

Primary Examiner—Thomas E. Lutz


(74) Attorney, Agent, or Firm—Swanson & Swanson LLC

(57)

ABSTRACT

A master cylinder for a hydraulic disc brake includes a housing defining a cylinder, the cylinder having a first and second end along its axis. A piston is received in the cylinder and has a radial seal between the piston and the cylinder. A lever is pivotally associated with the housing for pivoting between a rest position and an actuated position relative to the housing. A push rod is operatively associated with the piston and the lever to move the piston axially within the cylinder as the lever is actuated between the rest and actuated positions. A threaded engagement between a first end of the push rod and the lever is configured to cause movement of the rest position of the lever relative to the housing when a rotating force is applied to the push rod causing axial rotation of the push rod. An indexing structure is operatively associated with the push rod for providing index axial rotation of the push rod upon application of the rotating force to the push rod causing axial rotation of the push rod.

21 Claims, 23 Drawing Sheets



UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
APPLICATION NO. : 10/647543
DATED : October 25, 2005
INVENTOR(S) : Wayne R. Lumpkin

Page 1 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The title page should be deleted to appear as per attached title page.

In Fig. 7, delete section line label "B-B" and insert --8-8--.




Fig. 7

Amended

In Fig. 11, replace number designations "32" with --34--.

In Fig. 11, replace number designations "34" with --32--.




Fig. 11

Amended




Fig. 8

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
APPLICATION NO. : 10/647543
DATED : October 25, 2005
INVENTOR(S) : Wayne R. Lumpkin

Page 2 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

In Fig. 12, replace number designations "32" with --34--.

In Fig. 12, replace number designations "34" with --32--.

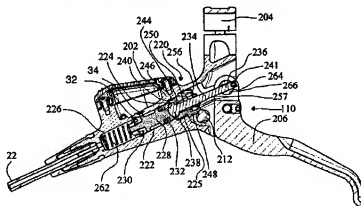


Fig. 12

Amended

At column 4, line 23, delete "line 12-12 of FIG. 1" and insert --line 12-12 of FIG. 10--.

At column 4, line 25, delete "FIG. 1" and insert --FIG. 10--.

At column 4, line 54, delete "24-24" and insert --25-25--.

At column 9, lines 32, delete "34" and insert --32--.

At column 9, line 52, delete "264" and insert --212--.

At column 10, line 17, delete "242" and insert --241--.

At column 11, line 8, delete "900-108" and insert --90°-108--.

At column 19, lines 60, delete "for moving for piston" and insert --for moving the piston--.

UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION

PATENT NO. : 6,957,534 B2
APPLICATION NO. : 10/647543
DATED : October 25, 2005
INVENTOR(S) : Wayne R. Lumpkin

Page 3 of 4

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

The last two clauses of Claim 21 were truncated in the printing of the patent. Claim 21 in its entirety appears below:

21. A master cylinder for a bicycle hydraulic disc brake, the master cylinder comprising:
a housing defining a cylinder, the cylinder having a first and second end;
a hydraulic fluid reservoir;
a port between the hydraulic fluid reservoir and the cylinder providing fluid communication between the hydraulic fluid reservoir and the cylinder, the port having a port opening located between the first and second ends of the cylinder;
a piston received in the cylinder having a seal operatively associated therewith, the seal having a leading edge, the leading seal edge being moveable between a select starting position with the leading seal edge between the first end and the port opening with the leading seal edge a select distance from the port opening and a pressurized position with the leading seal edge between the port opening and the second end, the leading seal edge preventing fluid flow between the cylinder and the reservoir when positioned between the port opening and the second end to pressurize the second end;
a one piece lever pivotably attached to the housing, the lever being associated with the piston to move the piston between the select starting position and the pressurized position as the lever is pivoted between the rest position and a fully actuated position;
reach adjustment means operatively associated with the lever for varying the rest position of the lever with respect to the housing independently of movement of the select distance between the port opening and the leading seal edge; and
dead band adjustment means operatively associated with the piston for moving the leading seal edge to adjust the select distance between the port opening and the leading seal edge without varying the rest position of the lever.

(12) United States Patent
Lampkin**(10) Patent No.: US 6,957,534 B2**
(45) Date of Patent: *Oct. 25, 2005**(54) REACH ADJUSTMENT MECHANISM FOR A MASTER CYLINDER LEVER OF A HYDRAULIC DISC BRAKE****(75) Inventor: Wayne R. Lampkin, Littleton, CO (US)****(73) Assignee: SRAM Corporation, Chicago, IL (US)****(*) Notice:** Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 3540(b) by 53 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: 10/647,543**(22) Filed: Aug. 18, 2003****(45) Prior Publication Date**

US 2004/0055840 A1 Mar. 25, 2004

Related U.S. Application Data**(63) Continuation of application No. 30/216,500, filed on Dec. 10, 2002, now Pat. No. 6,804,941.****(60) Provisional application No. 60/465,689, filed on Oct. 7, 2002, provisional application No. 60/464,130, filed on Oct. 4, 2002, and provisional application No. 60/444,030, filed on Dec. 28, 2001.****(51) Int. Cl. B61K 23/04; B62L 3/02****(52) U.S. Cl. 60/588; 60/594; 188/26;****(50) Field of Search 60/583, 594, 585,****60/588, 594; 188/202.2, 525; 74/25, 344****(56) References Cited****U.S. PATENT DOCUMENTS**4,560,449 A 12/1991 Uchihashi
4,626,045 A 12/1996 Dahl
4,779,482 A 10/1998 Kozmowski
4,870,345 A 11/1998 Matsushita
5,652,262 A 5/1997 Lohrer6,008,830 A * 12/1999 Bradley et al. 188/26
6,085,525 A 7/2000 Bradley
4,457,578 B2 10/2002 Hestinski
6,804,951 B2 10/2004 Lampkin**FOREIGN PATENT DOCUMENTS**DE 197 18 612 A1 11/1999
DE 200 18 706 U1 12/2000
EP 0 848 357 1/1999**OTHER PUBLICATIONS**

Formula Evolutions 9.5 Operating Manual, 2003, English Version, Author: Formula, an Italian Corporation.

Formula Racing FR—(Racing DH Spare parts price list, 2003-2003 Original Spare Parts, English Version, Author: Formula, an Italian Corporation.

Communication pursuant to Article 94(2) EPC, dated Feb. 18, 2004 in EP Application No. 02 080 490.2.

* cited by examiner

Primary Examiner—Thomas E. Lam

(74) Attorney, Agent, or Firm—Swanson & Bratschen LLC

(57)**ABSTRACT**

A master cylinder for a hydraulic disc brake includes a housing defining a cylinder, the cylinder having a first and second end along its axis. A piston is received in the cylinder and has a radial seal between the piston and the cylinder. A lever is pivotally associated with the housing for pivoting between a rest position and an actuated position relative to the housing. A push rod is operatively associated with the piston and the lever to move the piston axially within the cylinder as the lever is actuated between the rest and actuated positions. A threaded engagement between a first end of the push rod and the lever is configured to cause movement of the rest position of the lever relative to the housing when a mounting force is applied to the push rod causing axial rotation of the push rod. An indexing structure is operatively associated with the push rod for providing index axial rotation of the push rod upon application of the mounting force to the push rod causing axial rotation of the push rod.

21 Claims, 23 Drawing Sheets

